

ADIRONDACK-AIRE WMR CHASSIS SERIES

Replaces Singer / McQuay WM-B

Adirondack-Aire WMR series zerOzone console units provide environment friendly, high efficiency, cooling and heating where individual, quiet control is a priority. This application flexible unit is a direct replacement for Singer/McQuay WMB series console water source heat pump units. The WMR series is also an ideal choice for renovation or new construction console water source heat pump projects. These console units are offered as chassis only to work with the existing or custom room cabinets or with a new cabinet for a complete installation. The chassis contains the compressor, air side heat exchanger, water side heat exchanger, evaporator fan and motor, control components and safety components. The optional room cabinet is powder painted furniture-grade steel construction with extruded aluminum grille and control door. The WMR series has two chassis sizes, small (models 08, 10, and 12), and large (models 15 and 18).

All chassis sizes are dimensionally identical to the original for a fast, easy, and trouble-free installation. Quality components, careful design and testing, and the latest in environment friendly technology advances mean long unit life, user satisfaction, and lower energy costs. Consider the extensive list of standard features, which includes: powder painted drain pan, refrigerant circuit access ports, electrostatic air filter, evaporator freeze protection, water coil freezestat, high-pressure over protection, anti-short cycle protection and electronic control board. Adirondack-Aire is the replacement solution that the competition can't match. Cold Point Corp. backs the WMR with a customer friendly one-year parts and labor warranty and five-year compressor warranty, (see Warranty document for details). A full range of options are available, including low temperature option, boilerless control, hose kits, control options, etc.

Standard Features:

- · Made in the USA
- Designed for easy installation and compatibility. Dimensionally identical to the original Singer/McQuay chassis
- · ETL approved
- Quiet, durable, and efficient compressor with built-in pressure and temperature protection
- · Heavy gauge G90 galvanized steel construction
- · Powder-painted drain pan
- · High efficiency copper tube-aluminum fin evaporator coil
- High efficiency coaxial condenser coil with low water-side pressure drop
- · Unit-mounted digital controls

- Electronic control board with anti-short cycle protection
- · High pressure switch
- · Frost-free cooling
- · Water coil freeze protection
- · Refrigerant circuit access ports
- · Capillary expansion
- · Positive shift reversing valve
- Precision charged with zerOzone R-410A refrigerant
- 1/2 Inch water connections
- · Electrostatic air filter

Electrical Data*

Model	Compressor	Voltage	Fan		Compressor		Total	Ckt	Max	Min
	Type	Volt-Hz-Ph	Amps	НР	RLA	LRA	Amps	_	-	Volts
WMR-08	Rotary	115/60/1	1.2	1/10	6.1	39.1	7.3	9.0	15	104
WMR-08	Rotary	208-230/60/1	0.4	1/10	3.0	15.0	3.4	5.0	15	197
WMR-08	Rotary	265/60/1	0.4	1/10	2.7	11.0	3.1	4.0	15	240
WMR-10	Rotary	115/60/1	1.2	1/10	8.0	50.0	9.2	11.5	15	104
WMR-10	Rotary	208-230/60/1	0.4	1/10	4.4	20.0	4.8	6.0	15	197
WMR-10	Rotary	265/60/1	0.4	1/10	3.4	21.0	3.7	5.0	15	240
WMR-12	Rotary	115/60/1	1.2	1/10	9.5	50.0	10.7	14.0	20	104
WMR-12	Rotary	208-230/60/1	0.4	1/10	4.7	25.0	5.1	7.0	15	197
WMR-12	Rotary	265/60/1	0.4	1/10	4.2	22.0	4.6	6.0	15	240
WMR-15	Rotary	208-230/60/1	0.6	1/10	5.6	29.0	6.2	8.0	15	197
WMR-15	Rotary	265/60/1	0.6	1/10	5.0	28.0	5.6	7.0	15	240
WMR-18	Rotary	208-230/60/1	0.6	1/10	7.4	33.0	8.0	10.0	15	197
WMR-18	Rotary	265/60/1	0.6	1/10	6.0	28.0	6.6	9.0	15	240

^{*} If optional electric heat is selected see Electric Heat Ratings Table: Total Amps, Ampacity and Fuse is the larger Value.



Electrical Heat Ratings* (Boilerless)

Heater No.	Volt	Watts	Btuh	HTR Amps	Total HTR Amps	Min Ckt Amps	Max Fuse
1	208	1,000	3,400	4.8	5.4	7	15
	230	1,220	4,160	5.3	5.9	7	15
2	208	2,000	6,820	9.6	10.2	13	15
	230	2,450	8,350	10.7	11.3	14	15
	277	2,000	6,820	7.3	7.9	10	15

^{*}Optional

WMR CHASSIS APPLICATION & BENEFITS

Fast and Easy Replacement

The Adirondack-Aire WMR series zerOzone replacement chassis fits the existing Singer/McQuay room cabinets without modification. Because the WMR dimensions and construction details are like the original, replacement work is fast and easy. The chassis is field adaptable to either LH or RH piping applications, offering maximum flexibility and spare chassis interchangeability. Water, drain and electrical connections line right up to the original installation. Using Adirondack-Aire replacements eliminates the need for room renovation, redecorating, or piping and wiring changes. The WMR is

the solution that gets your property back in service quickly and at the lowest total cost. Choose the optional room cabinet to give the unit a new look and improve room aesthetics, or the low temperature option for earth coupled or ground water applications.

Damage Protection

The standard high-pressure switch, evaporator coil freeze protection, and electronic control board stop unit operation before damage occurs, should airflow become reduced or obstructed due to dirty filters, obstructed airflow, or motor failure. A freezestat protects the water coil from freeze damage due to water temperature

or flow problems. The water coil is designed for low water-side pressure drop, eliminating potential pump sizing and water flow problems.

Options and Accessories

- Room cabinet (LH and RH available)
- · Flow control valve
- · Electric or hydronic heat
- · Control options
- · Valves and unions
- Line cordsBoilerless
- Hose kits
- · Customer-specified custom features
- · Low temp option

Performance Ratings

Model	Cool Btuh	Sens Btuh	EER	Heat Btuh	СОР	CFM Hi/Lo	GPM	Coil PD	Refrigerant
WMR-08	7,800	6,000	14.0	9,200	4.4	300/250	2.0	1.2'	R-410A
WMR-10	10,600	8,000	13.6	12,100	4.6	395/330	2.5	1.8'	R-410A
WMR-12	11,500	9,400	12.4	14,000	4.3	400/350	3.0	2.5'	R-410A
WMR-15	14,700	10,700	13.8	16,100	4.3	475/400	3.8	4.6'	R-410A
WMR-18	17,800	13,700	13.1	21,000	4.4	540/420	4.5	3.3'	R-410A

Continuous engineering improvements may result in performance changes without notice.

Unit Sizes


Model	Α	В	С	D	E	F	G	н	Chassis Weight
	Inches							(lbs)	
WMR-08	44 9/16	10 3/4	8 7/8	37 3/4	6 1/4	2 5/8	10 1/4	23 5/16	116
WMR-10	44 9/16	10 3/4	8 7/8	37 3/4	6 1/4	2 5/8	10 1/4	23 5/16	118
WMR-12	44 9/16	10 3/4	8 7/8	37 3/4	6 1/4	2 5/8	10 1/4	23 5/16	120
WMR-15	54 9/16	12 9/16	10 7/8	42 3/4	10 3/4	3 1/2	12 1/8	24	145
WMR-18	54 9/16	12 9/16	10 7/8	42 3/4	10 3/4	3 1/2	12 1/8	24	155

NEMA Configurations

Non Locking Plugs/Receptacles

Non Looking Flago/Hoooptaoloo						
Voltage	125V	250V	277V			
15A Recp.	5-15R	6-15R	7-15R			
15A Plug	5-15P	6-15P	7-15P			
20A Recp.	5-20R	6-20R [©] □ □	7-20R			
20A Plug	5-20P	6-20P	7-20P			
30A Recp.	5-30R	6-30R	7-30R			
30A Plug	5-30P	6-30P	7-30P			

277V Line cord N/A as factory installed

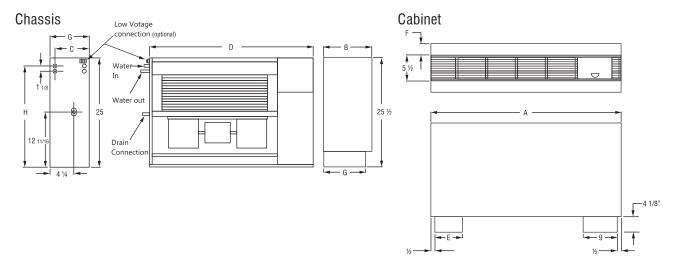

INNOVATIVE HEATING AND COOLING SOLUTIONS

Cold Point equipment has been specified in hundreds of projects in these and other applications:

Direct Replacement | New Construction | Renovation | Commercial & Residential Solutions

Cold Point values reliability as much as you

Your Cold Point sales representative knows their reputation is on the line with every sale. Therefore, they are as personally invested in your comfort as you are, and take great pride in creating your perfect indoor environment.

Rest comfortably, knowing Cold Point stands behind our products

The Cold Point Corporation backs our products with a standard warranty that includes labor for the entire first year of ownership. Registered Limited Warranty terms include: 12 month limited warranty on components, 60 month limited warranty on all unit compressors from the date of original installation OR 15 months limited warranty on components, 63 month limited warranty on all unit compressors from the date of original sale, whichever comes first. For all coverage options and complete coverage terms, check with your local Cold Point representative for full details.

Industry-leading expertise

Cold Point Corporation is the industry-leading supplier of aftermarket comfort solutions for commercial and residential applications. We have over 18 years of experience developing OEM-style replacement products to keep you happy and comfortable. Whether it is a water source heat pump application or an air source PTAC system, Cold Point has the knowledge and products to restore your system to its original operating condition.

Reliable comfort products backed by the industry experts in OEM-style replacement units

To learn more about how the Cold Point Corporation can help you save time and money on your next project, contact your local Cold Point representative. Call **315-339-2331** to speak with one of our specialists, or e-mail your request to **info@coldpointcorp.com**.

Your Cold Point Representative:							



510 Henry Street • Rome, New York 13440 Phone (315) 339-2331 • Fax (315) 339-2358 www.ColdPointCorp.com

