
# Adirondack Aire BY COLD POINT

## Series 45

### American Standard Type 45, McQuay ENR, Carteret Type 45, Remington / Singer Type 45, IslandAire 45 and RetroAire RC-10

Application Flexible | Fast and Easy Replacement | Damage Protection

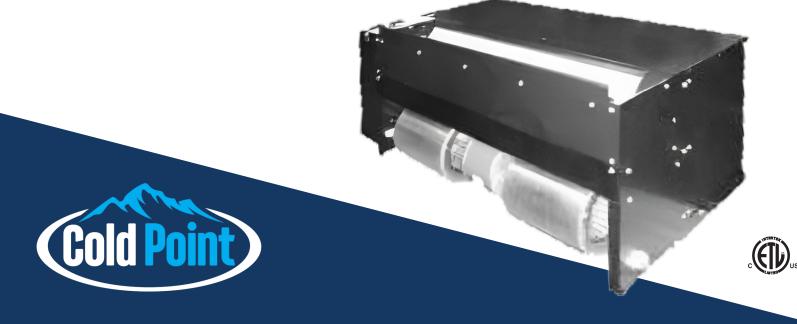

# **ADIRONDACK-AIRE 45 CHASSIS SERIES**

#### Replaces American Standard Type 45, McQuay ENR, Carteret Type 45, Remington / Singer Type 45, IslandAire 45 and RetroAire RC-10

The Adirondack-Aire 45 Series chassis provides environment friendly, high efficiency cooling and heating where individual, quiet control is a priority. This application flexible unit is also a direct replacement for American Standard Type 45, Carteret Type 45, Remington/Singer Type 45, IslandAire 45, and RetroAire RC-10 chassis. The chassis is a part of a complete system, which consists of the chassis, wall sleeve, outdoor louver, room cabinet, and sometimes a heat section. The chassis contains the compressor, indoor and outdoor heat exchangers, fan motors and fans, and controls.

The 45 is dimensionally compatible with the original for a fast, easy, and trouble-free installation. Quality components, careful design and testing and the latest in environment friendly technology mean long unit life, user satisfaction, and lower energy costs. Consider the extensive list of standard features which includes: Rust-Block\* corrosion protection system, evaporator freeze protection, pull handle, and high-pressure over protection. Adirondack-Aire is the replacement solution that the competition can't match. Cold Point Corp. backs the 45 with a customer friendly one-year parts and labor warranty and five-year compressor warranty, (see Warranty document for details).

\* Rust-Block corrosion protection system consists of: Heavy gauge galvanized steel construction with powder paint finished condenser and evaporator pans; galvanized or aluminum condenser fan, stainless steel compressor and condenser motor studs; Magnaguard and/or stainless steel screws and fasteners.

#### **Standard Features:**

- · Made in the USA
- Designed for easy installation. Dimensionally compatible with the original American Standard, McQuay, Carteret, Remington/ Singer, IslandAire and RetroAire chassis
- Exclusive Rust-Block corrosion protection
- High efficiency PSC fan motors with built-in temperature protection
- · ETL approved
- Quiet, durable, and efficient compressor with built-in pressure and temperature protection
- Heavy gauge G60 galvanized steel construction with powder coat painted condenser and evaporator pans
- \*\* Cooling operation locks out at 34°F outdoor temperature and restarts at 55° F. \*\*\*Actual temperature affected by relative humidity, solar effect, etc.

- High efficiency copper tube-aluminum fin evaporator and condenser coils
- Slinger condenser fan
- · Condensate re-evaporation
- · High pressure switch with manual reset
- · Frost-free low ambient cooling\*\*
- · Chassis pull handle facilitates easy chassis removal and handling
- Capillary expansion
- · Precision charged with R-454B A2L refrigerant
- LCDI Line Cord (ex. 265V)

#### **Electrical Data\***

Model	Compressor Type	Voltage Volt-Hz-Ph	Evaporator Motor		Condenser Motor		Compressor		Total	Ckt	Max	Min	Line
			Amps	HP*	Amps	HP	RLA	LRA	Amps	Amps	Fuse	Volts	Cord
45-09	Rotary	115/60/1	1.2	1/10	1.2	1/10	8.0	50.0	10.4	12.4	20	104	5-20P
45-09	Rotary	208/230/60/1	0.6	1/10	0.6	1/10	3.7	22.0	4.9	5.8	15	197	6-15P
45-09	Rotary	265/60/1	0.6	1/10	0.6	1/10	3.5	22.0	4.7	5.6	15	240	N/A
45-12	Rotary	115/60/1	1.2	1/10	1.2	1/10	10.5	57.0	12.9	15.5	25	104	5-20P
45-12	Rotary	208/230/60/1	0.6	1/10	0.6	1/10	5.2	26.0	6.4	7.7	15	197	6-15P
45-12	Rotary	265/60/1	0.6	1/10	0.6	1/10	4.3	25.0	5.5	6.6	15	240	N/A
45-15	Rotary	208/230/60/1	0.6	1/10	1.6	1/4	6.6	33.0	8.8	10.5	15	197	6-15P
45-15	Rotary	265/60/1	0.6	1/10	1.6	1/4	5.6	28.0	7.8	9.2	15	240	NIA
45-18	Rotary	208/230/60/1	0.6	1/10	1.6	1/4	8.5	33.0	10.7	12.8	20	197	6-20P
45-18	Rotary	265/60/1	0.6	1/10	1.6	1/4	6.0	28.0	8.2	9.7	15	240	N/A



\* If optional electric heat is selected see Electric Heat Ratings Table: Total Amps, Ampacity and Fuse size is the larger value.

### **45 SERIES CHASSIS APPLICATION & BENEFITS**

#### **Fast and Easy Replacement**

The Adirondack-Aire 45 series replacement chassis fits the existing wall sleeves and room cabinets without modification. Because the chassis dimensions and construction details are like the original, replacement work is fast and easy. A chassis pull handle is provided to facilitate easy removal and handling. Using Adirondack-Aire replacements eliminates the need for room and exterior wall renovation. The 45 series is the solution that gets your property back in service quickly and at the lowest total cost. Choose the optional room cabinet to give the unit a brand new look and improve room aesthetics.

#### **Damage Protection**

A premium feature usually found only in expensive commercial systems, the standard high-pressure switch and evaporator freeze protection stop unit operation before damage occurs, should airflow become reduced or obstructed due to dirty coils, obstructed airflow, or motor failure or lock up. A slinger condenser fan and draw-thru airflow pattern reevaporates condensate and makes cleaning dirty coils easy. Condensate re-evaporation and the Rust-Block system assure a stain-free building exterior.

#### **Options and Accessories**

- Electric heat
- Control options
- · Motorized fresh air
- 117V and 265/277V (availability varies by model size)


#### **Performance Ratings**

Model	Cool Btuh	Sens Btuh	EER	Cond. Fan Type/ Air Direction	CFM Hi/Lo*	Refrigerant	
45-09	9,900	7,800	10.8	Axial/Draw Thru	440/350	R-454B	
45-12	11,500	8,400	9.2	Axial/Draw Thru	440/350	R-454B	
45-15	15,600	11,600	9.5	Axial/Draw Thru	550/450	R-454B	
45-18	17,300	12,200	10.4	Axial/Draw Thru	550/450	R-454B	

Continuous engineering improvements may result in performance changes without notice. \* Dry coil airflow

#### **Unit Sizes**

Model	А	в	с	C D		F	Chassis Weight	
	Inches							
45-09, 12, 15, 18	15 1/2	35 3/4	34 9/16	14 7/16	20 1/8	11 3/8	115	

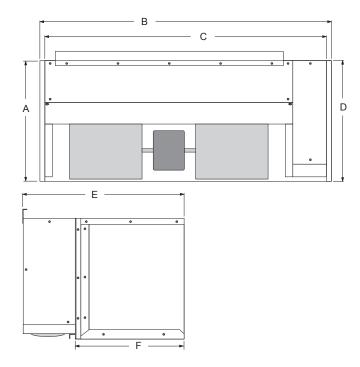

### NEMA Configurations

Non Locking Plugs/Receptacies								
Voltage	125V	250V	277V					
15A Recp.	5-15R	6-15R <sup>G</sup> ♥	7-15R					
15A Plug	5-15P	6-15P	7-15P					
20A Recp.	5-20R	6-20R <sup>©</sup> □₽	7-20R					
20A Plug	5-20P	6-20P	7-20P					
30A Recp.	5-30R	6-30R <sup>©</sup> □	7-30R G∪ ♥					
30A Plug	5-30P	6-30P	7-30P					

#### Electrical Heat Ratings (Optional)

Heater No. (WCU)	Volt	Watts	Btuh	HTR Amps	Total HTR Amps	Min Ckt Amps	Max Fuse	Line Cord
	208	1,800	6,140	8.7	9.3	12.0	15	6-15P
2	230	2,200	7,500	9.6	10.2	13.0	15	6-15P
2	265	2,900	9,900	10.9	11.5	15.0	15	N/A
	277	3,190	10,900	11.5	12.1	15.0	15	N/A
	208	2,450	8,350	11.8	12.4	16.0	20	6-20P
	230	3,000	10,200	13.1	13.7	17.0	20	6-20P
3	265	4,000	13,640	15.1	15.7	20.0	20	N/A
	277	4,350	14,830	15.7	16.3	21.0	25	N/A
	208	3,270	11,150	15.7	16.3	21.0	25	6-30P
4	230	4,000	13,640	17.4	18.0	23.0	30	6-30P

# **INNOVATIVE HEATING AND COOLING SOLUTIONS**

Cold Point equipment has been specified in hundreds of projects in these and other applications: Direct Replacement | New Construction | Renovation | Commercial & Residential Solutions

#### Cold Point values reliability as much as you

Your Cold Point sales representative knows their reputation is on the line with every sale. Therefore, they are as personally invested in your comfort as you are, and take great pride in creating your perfect indoor environment.

#### Rest comfortably, knowing Cold Point stands behind our products

The Cold Point Corporation backs our products with a standard warranty that includes labor for the entire first year of ownership. Registered Limited Warranty terms include: 12 month limited warranty on components, 60 month limited warranty on all unit compressors from the date of original installation OR 15 months limited warranty on components, 63 month limited warranty on all unit compressors from the date of original sale, whichever comes first. For all coverage options and complete coverage terms, check with your local Cold Point representative for full details.

#### Industry-leading expertise

Cold Point Corporation is the industry-leading supplier of aftermarket comfort solutions for commercial and residential applications. We have over 25 years of experience developing OEM-style replacement products to keep you happy and comfortable. Whether it is a water source heat pump application or an air source PTAC system, Cold Point has the knowledge and products to restore your system to its original operating condition.

#### Reliable comfort products backed by the industry experts in OEM-style replacement units

To learn more about how the Cold Point Corporation can help you save time and money on your next project, contact your local Cold Point representative. Call **315-339-2331** to speak with one of our specialists, or e-mail your request to **info@coldpointcorp.com**.

Your Cold Point Representative:



510 Henry Street • Rome, New York 13440 Phone (315) 339-2331 • Fax (315) 339-2358 www.ColdPointCorp.com ©2024 Cold Point Corp. All rights reserved.

